




waste gas temperature at recuperator outlet in °C

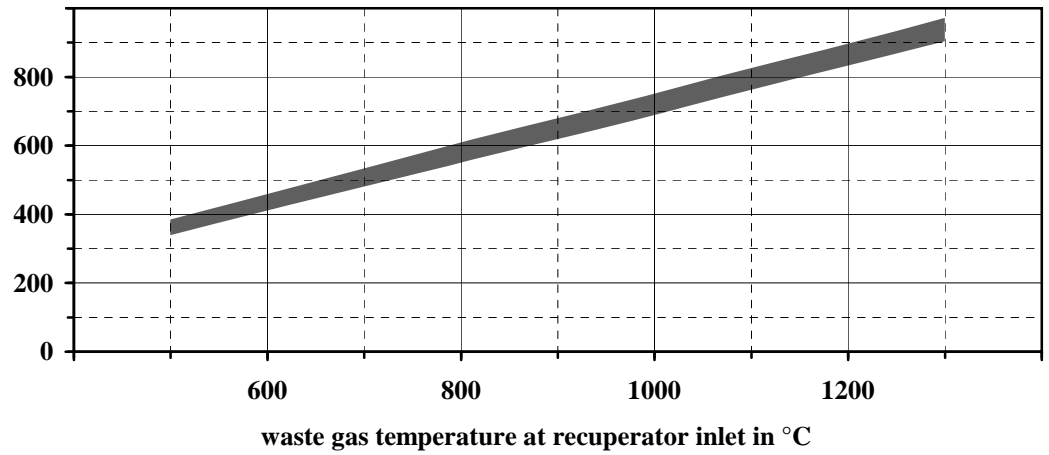

Firing efficiency rate in %

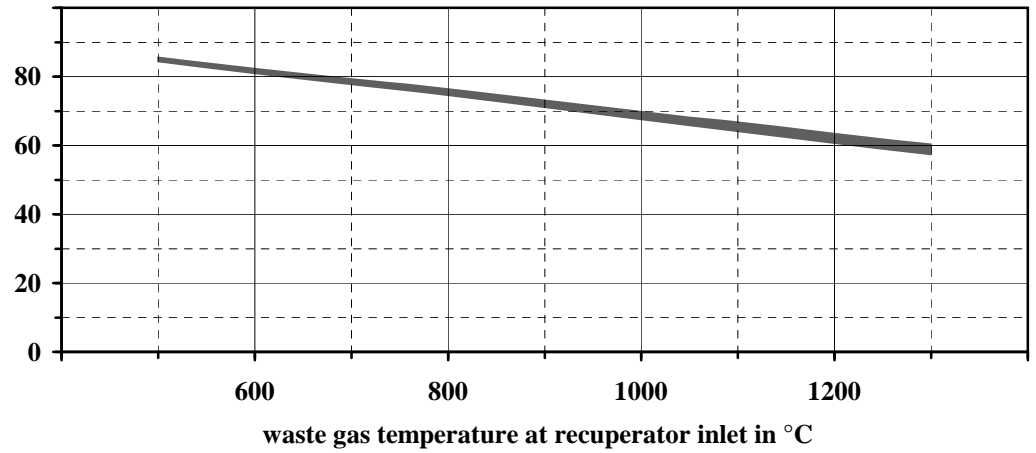

NO_x - emission in mg / m_N³ based on 5 % O₂ in waste gas

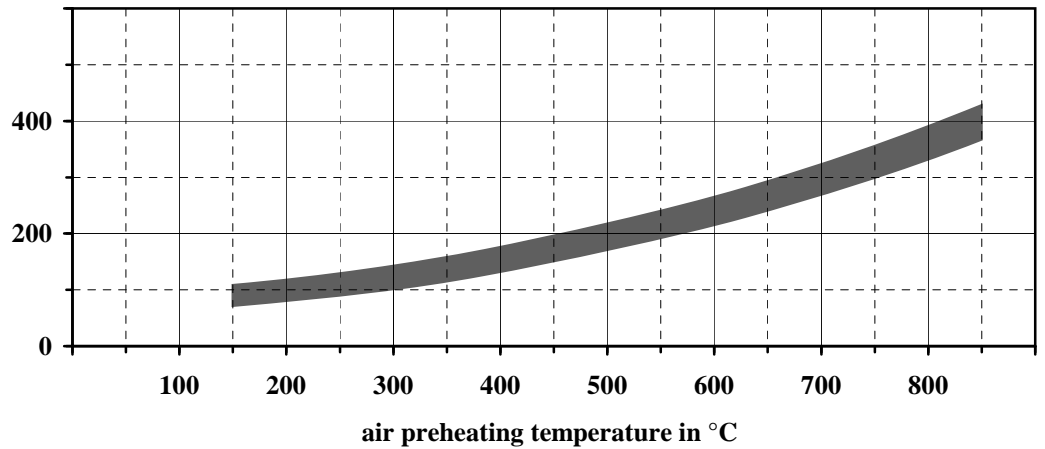

valid for:

- indirect heating
- direct heating with 100 % exhaust gas extraction
- thermal capacity 15 kW
- continues operation
- natural-gas-H
- λ = 1,10 ... 1,20

The parameters specified shall be regarded as recommended ones. They are dependent on various factors that may vary in practice from the conditions specified above. Parameters for special conditions of use can be obtained from NOXMAT GmbH on request.

Data sheet

Recuperated High-Velocity Burner NOXMAT K-RHGB 15-G

NOXMAT
Combustion Technology


Protection notice DIN ISO 16016 to observe

DB 000 029


sheet of
1 1

index	remark	date	name	date	name	replacement for:	replacement by:	A4
				edit.	29. 07. 2009	Fritzsch		
				review.	29. 07. 2009	Lohr		
				N:\06_Entwicklung\Internetunterlagen\...				


waste gas temperature at recuperator outlet in °C

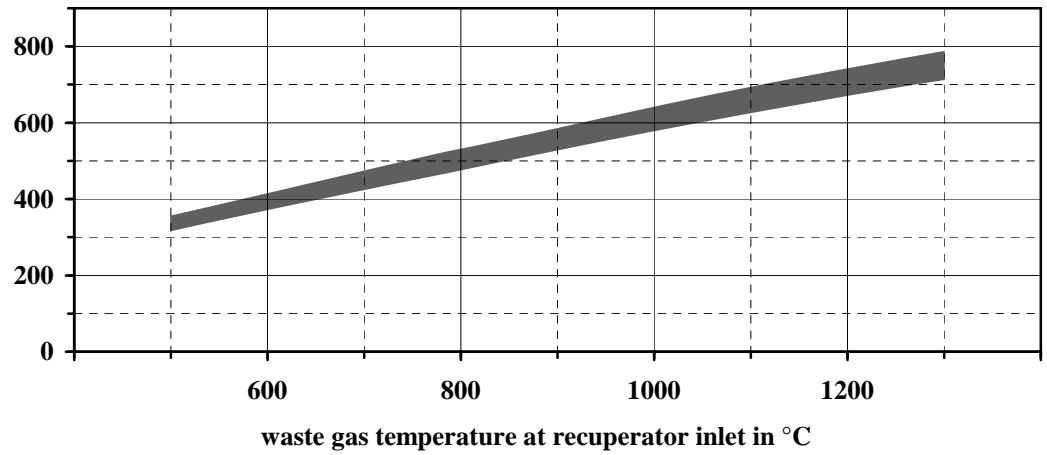

Firing efficiency rate in %

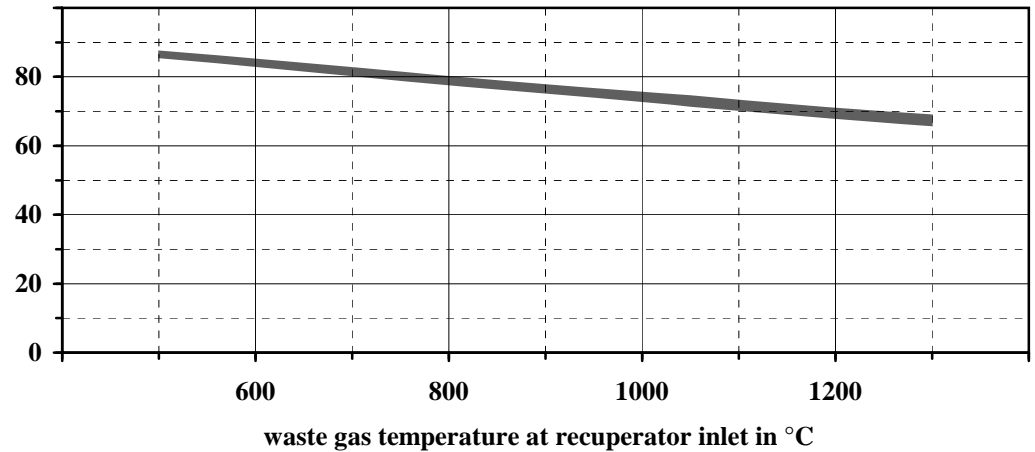

NO_x - emission in mg / m_N³ based on 5 % O₂ in waste gas

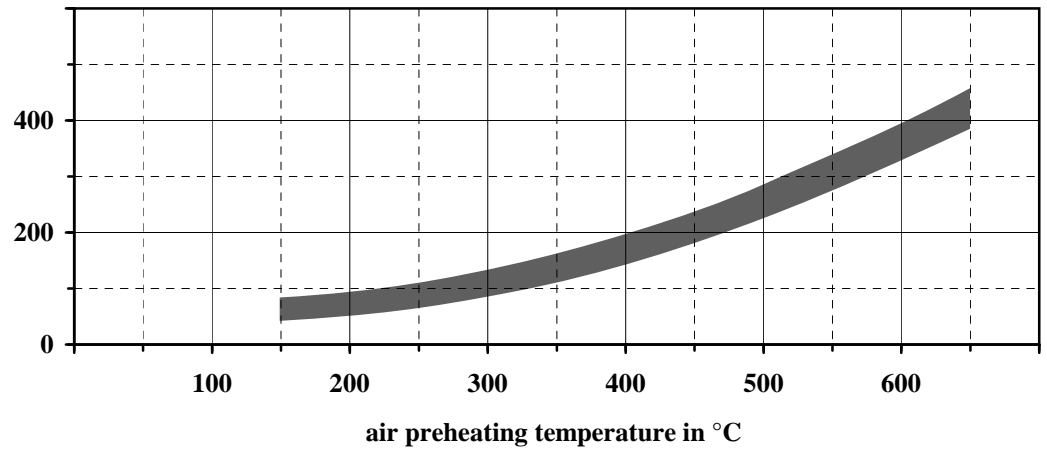

valid for:

- indirect heating
- direct heating with 100 % exhaust gas extraction
- thermal capacity 15 kW
- continues operation
- natural-gas-H
- λ = 1,10 ... 1,20

The parameters specified shall be regarded as recommended ones. They are dependent on various factors that may vary in practice from the conditions specified above. Parameters for special conditions of use can be obtained from NOXMAT GmbH on request.

Data sheet

Recuperated High-Velocity Burner NOXMAT K-RHGB 15

NOXMAT
Combustion Technology


Protection notice DIN ISO 16016 to observe

DB 000 030


sheet of
1 1

index	remark	date	name	date	name	replacement for:	replacement by:	A4
				edit.	06. 04. 2009	Fritzsch		
				review.	07. 04. 2009	Lohr		
						N:\06_Entwicklung\Internetunterlagen\...		


waste gas temperature at recuperator outlet in °C

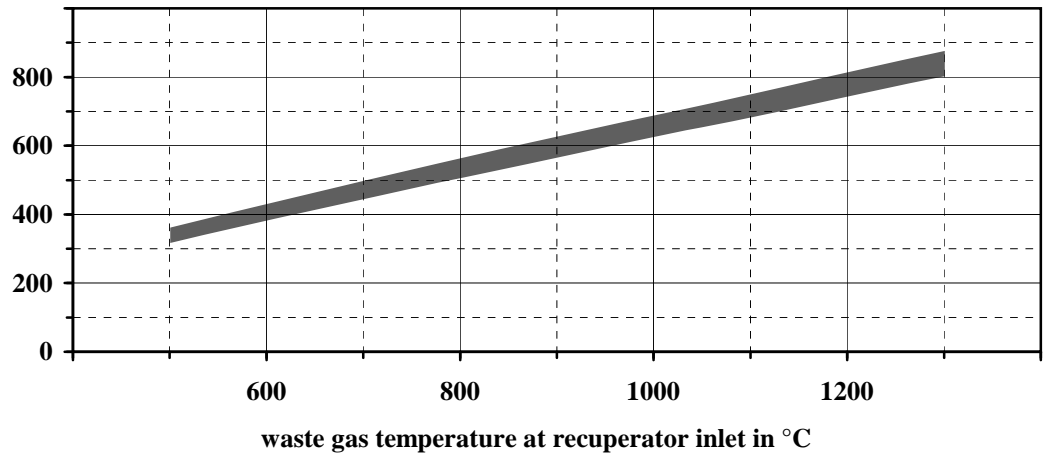

Firing efficiency rate in %

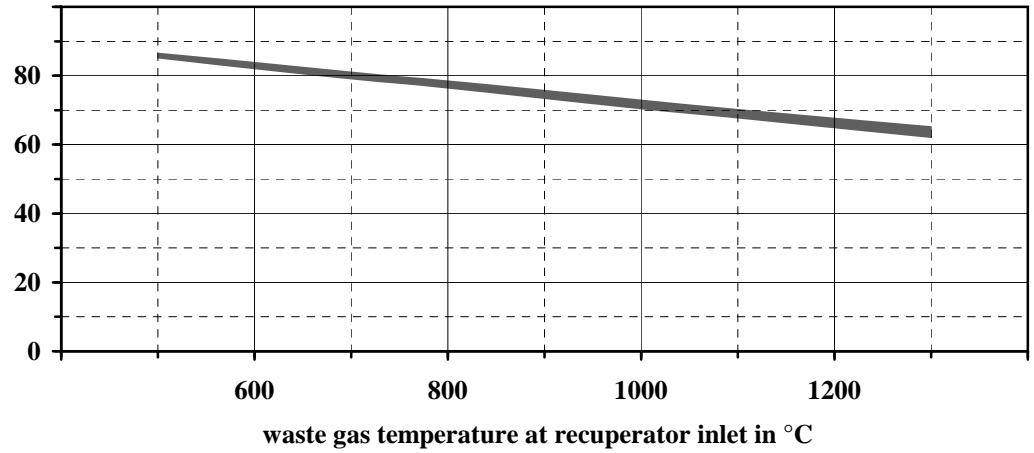

NO_x - emission in mg / m_N³ based on 5 % O₂ in waste gas

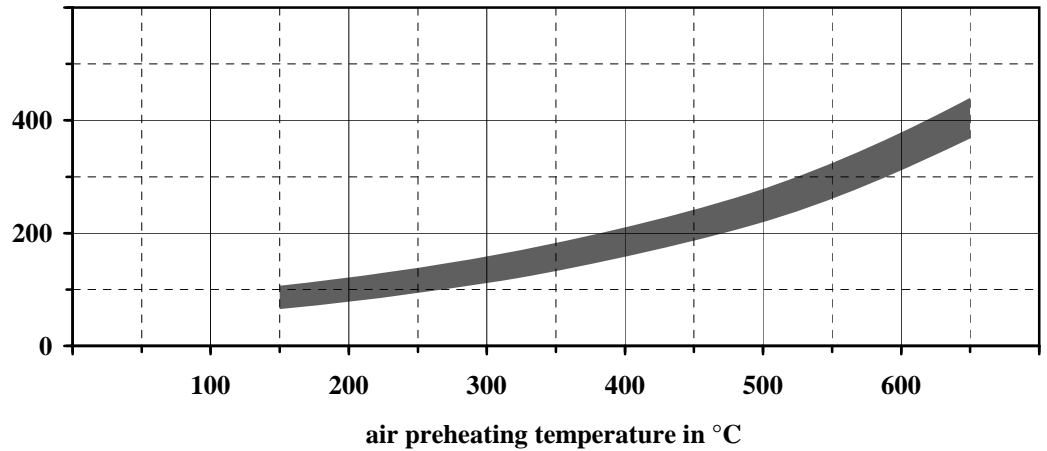

valid for:

- indirect heating
- direct heating with 100 % exhaust gas extraction
- thermal capacity 25 kW
- continues operation
- natural-gas-H
- λ = 1,10 ... 1,20

The parameters specified shall be regarded as recommended ones. They are dependent on various factors that may vary in practice from the conditions specified above. Parameters for special conditions of use can be obtained from NOXMAT GmbH on request.

Data sheet

Recuperated High-Velocity Burner
NOXMAT K-RHGB 25

NOXMAT
Combustion Technology


Protection notice DIN ISO 16016 to observe

DB 000 031


sheet of
1 1

index	remark	date	name	date	name	replacement for:	replacement by:	A4
				edit.	06. 04. 2009	Fritzsch		
				review.	07. 04. 2009	Lohr		
						N:\06_Entwicklung\Internetunterlagen\...		


waste gas temperature at recuperator outlet in °C

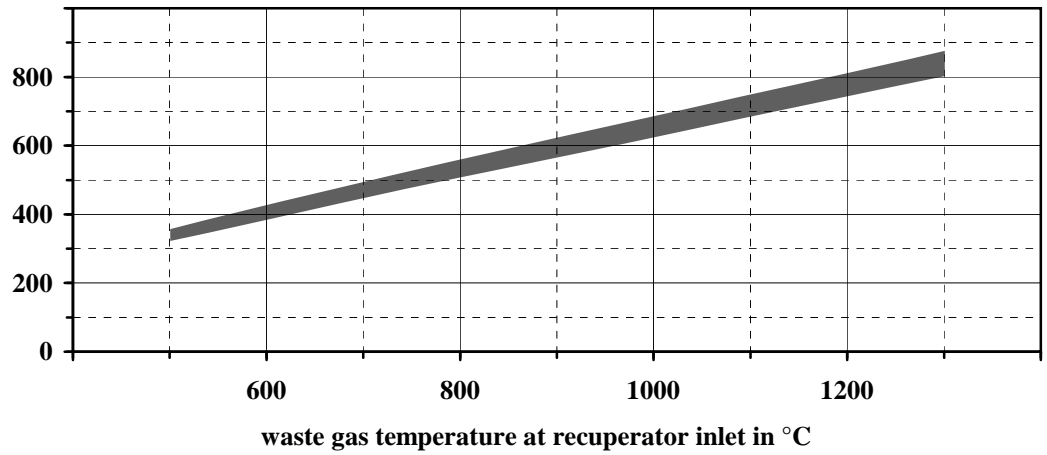

Firing efficiency rate in %

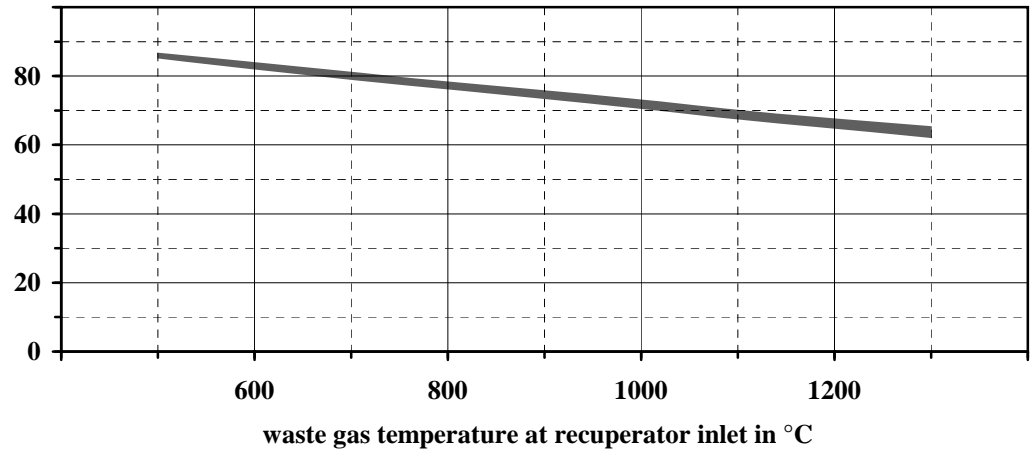

NO_x - emission in mg / m_N³ based on 5 % O₂ in waste gas

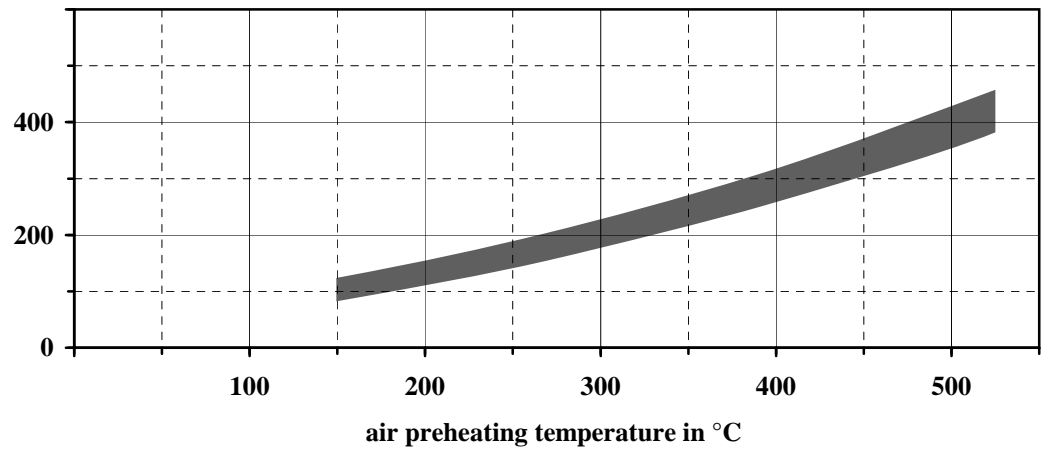

valid for:

- indirect heating
- direct heating with 100 % exhaust gas extraction
- thermal capacity 40 kW
- continues operation
- natural-gas-H
- $\lambda = 1,10 \dots 1,20$

The parameters specified shall be regarded as recommended ones. They are dependent on various factors that may vary in practice from the conditions specified above. Parameters for special conditions of use can be obtained from NOXMAT GmbH on request.

Data sheet

Recuperated High-Velocity Burner
NOXMAT K-RHGB 40

NOXMAT
Combustion Technology


Protection notice DIN ISO 16016 to observe

DB 000 032


sheet of
1 1

index	remark	date	name	date	name	replacement for:	replacement by:	A4
				edit.	06. 04. 2009	Fritzsch		
				review.	07. 04. 2009	Lohr		
						N:\06_Entwicklung\Internetunterlagen\...		


waste gas temperature at recuperator outlet in °C

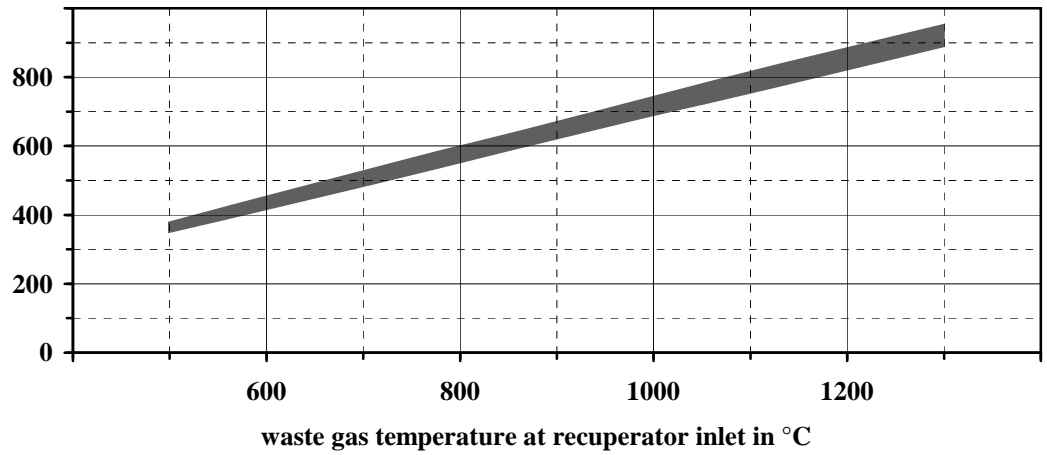

Firing efficiency rate in %

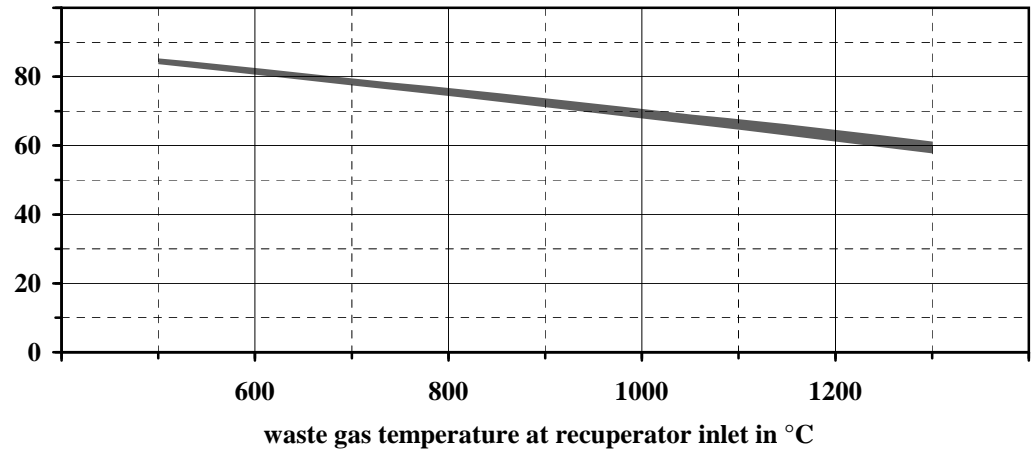

NO_x - emission in mg / m_N³ based on 5 % O₂ in waste gas

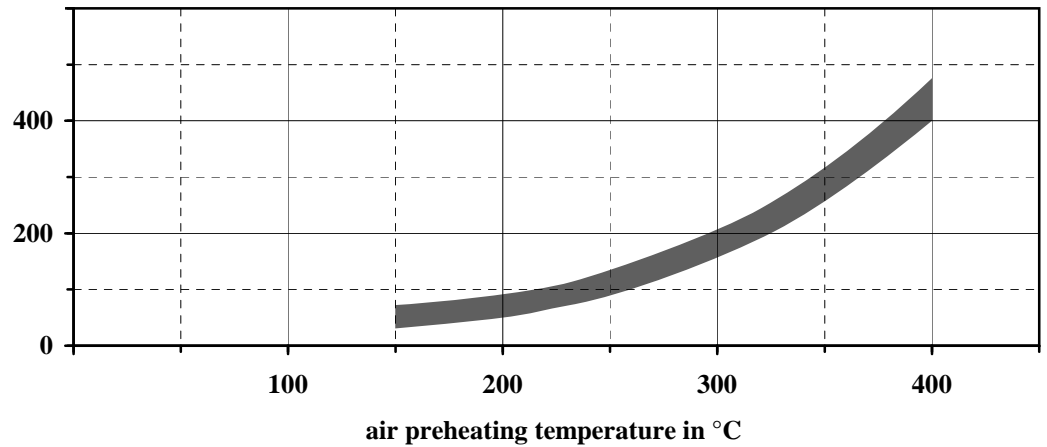

valid for:

- indirect heating
- direct heating with 100 % exhaust gas extraction
- thermal capacity 80 kW
- continues operation
- natural-gas-H
- λ = 1,10 ... 1,20

The parameters specified shall be regarded as recommended ones. They are dependent on various factors that may vary in practice from the conditions specified above. Parameters for special conditions of use can be obtained from NOXMAT GmbH on request.

Data sheet

Recuperated High-Velocity Burner
NOXMAT K-RHGB 80

NOXMAT
Combustion Technology

Protection notice DIN ISO 16016 to observe

DB 000 033

sheet of
1 1

index	remark	date	name	date	name	replacement for:	replacement by:	A4
				edit.	06. 04. 2009	Fritzsch		
				review.	07. 04. 2009	Lohr		
						N:\06_Entwicklung\Internetunterlagen\...		

